


Empty enclosure

AKL 3-gh

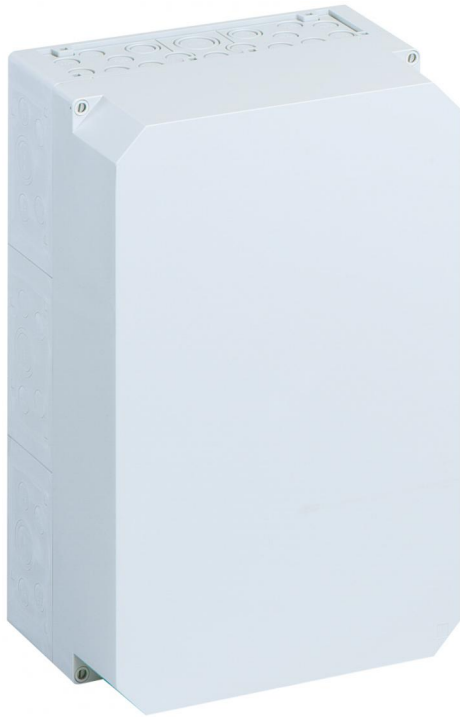

AKL 3-gh

Empty enclosure

CUSTOMIZABLE

Productnumber: 74290301

Dimensions: 300 x 450 x 209 mm

Empty enclosure IP65 polystyrene

Box and cover, polystyrene, grey similar to RAL 7035, metric pre-embossings

IP65

IK07



690V
AC

1000V
DC



To industrial product:

<https://www.spelsberg.com/p/74390301>

Technical Data

electrical characteristics

Protection type UL:	not specified
Rated insulation voltage AC:	690 V
Rated insulation voltage DC:	1000 V
Type of protection:	IP65
Protection class:	II

Colours

Cover colour:	grey
---------------	------

Dimensions

Width:	300 mm
Length:	450 mm
Height:	209 mm

Material characteristics

suitable for exterior use:	no
Burning behaviour in accordance with UL 50/UL 746C:	HB
Flammability class according with UL94:	V2
Glow-wire flammability according to EN 60695-2-11:	750 °C
Halogen free:	yes
Industry quality:	no

mechanical properties

Type of fastening:	Wall/ceiling mounting
Sealable:	yes
Stackable:	yes
Impact strength:	IK07

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Material

Base unit material:	Polystyrene
Cover material:	Polystyrene
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced

Accessories

ASS-gro - External hinge set

AK NS35-250 - Standard rail

AK ABL-ES - External fixing lugs

AK MPI 3 - Mounting plate

NS35-216/3 - Standard rail

NS 35-406 - Standard rail

AK ABF 2 - Enclosure wall

AK TW - Partition wall