


Junction box

Abox 040 AB-4²

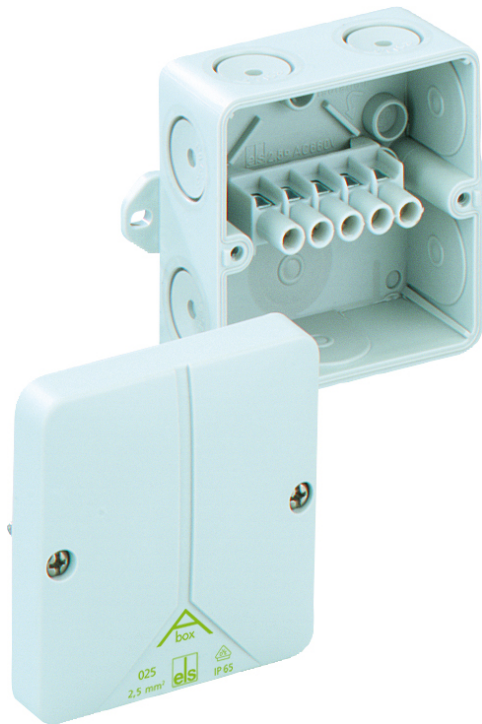

Abox 040 AB-4²

Junction box

CUSTOMIZABLE

Productnumber: 80540701
Dimensions: 93 x 93 x 55 mm

Junction box acc. to DIN EN 60670 (VDE 0606),
Ui=690V, with self-sealing, soft inlet membranes,
M20, seal range 2 - 16 mm, with external fixing
lugs

**Grey, with screw terminal, 5-pole - 2.5/4
mm² (4 x 1.5² / 4 x 2.5² / 3 x 4²)**

IP65

4²

IK07



690V
AC



To industrial product:
<https://www.spelsberg.com/p/49440401>

Technical Data

electrical characteristics

Protection type UL:	not specified
Rated insulation voltage AC:	690 V
Type of protection:	IP65
Circuit integrity class:	none
Max. conductor cross section:	4 mm ²
Protection class:	II

Colours

Cover colour:	grey
---------------	------

Dimensions

Length:	93 mm
Width:	93 mm

Dimensions

Height:	55 mm
---------	-------

Material characteristics

suitable for exterior use:	no
Halogen free:	yes
Industry quality:	no

mechanical properties

Type of fastening:	Wall/ceiling mounting
Sealable:	yes
Cover screw torque:	1 Nm
Impact strength:	IK07

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25
Max. ambient temperature:	40
24h ambient temperature:	35

Material

Base unit material:	Polystyrene
Cover material:	Polystyrene
Cover screw material:	Stainless steel V2A

Certificates

Test mark:	VDE
------------	-----

Accessories

KS M20 - Combi set

WST M20 - Twist plug

WNI M20 - Twist nipple

SNI M20 - Stepped nipple

KVR M20-MGM - Cable gland

KVR M20-GDB/MGM - Cable gland

AST M20 - Attachment bushes

VST M20 - Sealing plugs

DMS M20/w - M20, white

DMS M20 - Double-membrane seals

BST M20/sw - Ventilation seal

BST M20 - Ventilation seal

RST M20 - Conduit connector

Abox 025/040 KLS-2,5²/4² - Terminal block