

2167.0

Q 10

Q 10



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 153 mm, Rated cross-section: 35 mm², Colour: natural

Business data

Product description	Cross-connector
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	97.6
Weight per piece (including packaging)	98
Unit of weight	G
Customs number	85389099
Country of origin	DE

2167.0

Q 10

Q 10

Technical Data

Dimensions

Length	8 mm
Width	153 mm
Hole diameter	4.6 mm
Hole spacing (mid-point to mid-point)	16 mm
Pitch size	16 mm

Ratings

Voltage with partition, max.	800 V
Voltage without partition, max.	400 V
Rated current	65 A
Rated cross-section	35 mm ²
Contamination degree	3

Connection data

No. of poles	10
Screw head	Slotted
Screw threading	M 4
Tightening torque, min.	1.2 Nm

2167.0

Q 10

Q 10

Technical Data

Connection data

Tightening torque, max.	2 Nm
-------------------------	------

Materials

Material	Brass
----------	-------

Surface	Tin-plated
---------	------------

Surface screw	Galvanized
---------------	------------

Further technical data

Mounting type	Screwable
---------------	-----------


Number of bridged terminals	10
-----------------------------	----

2167.0

Q 10

Q 10

Media

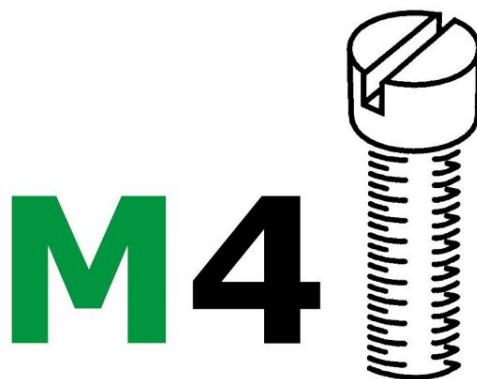

2167.0

Q 10

Q 10

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1087.0	SDB 0,8x4,0	4044211014803	1 PC
